



KRAMER ELECTRONICS LTD.

USER MANUAL

MODEL:

6810HDxI


SDI/HD-SDI/3G Audio
Embedder/De-embedder

6810HDxI Quick Start Guide

This page guides you through a basic installation and first-time use of your **6810HDxI**. For more detailed information, see the **6810HDxI** User Manual. You can download the latest manual at <http://www.kramerelectronics.com>.

Step 1: Check what's in the box

- ☒ **6810HDxI** SDI/HD-SDI/3G Audio Embedder/De-embedder
- ☒ 1 Power supply (5V DC)
- ☒ 4 Rubber feet
- ☒ 1 Quick Start sheet
- ☒ 1 User Manual




Save the original box and packaging in case your **6810HDxI** needs to be returned to the factory for service.

Step 2: Install the 6810HDxI

Attach the rubber feet and place on a table or mount the machine in a rack (using an optional RK-1 rack mount).

Step 3: Connect the inputs and outputs

Always switch off the power on each device before connecting it to your **6810HDxI**.

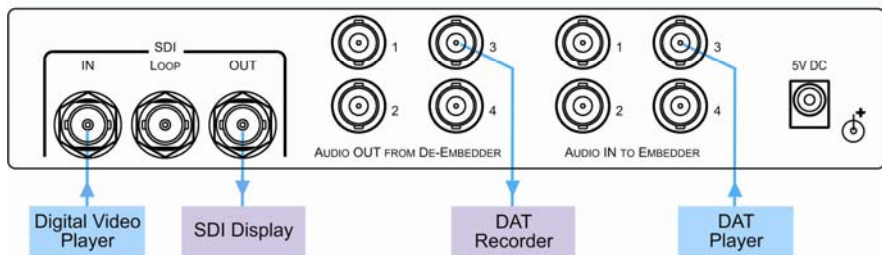

Always use Kramer high-performance cables for connecting AV equipment to the **6810HDxI**.

Step 4: Connect the power

Connect the 5V DC power adapter to the **6810HDxI** and plug the adapter into the mains electricity.



Step 5: Operate the Product

Press the buttons to select a group from 1 to 4 to embed into or de-embed from each channel pair.

DE-EMBEDDER GROUP SELECT		EMBEDDER GROUP SELECT	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
OUT 1-2		IN 1-2	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
OUT 3-4		IN 3-4	

Contents

1	Introduction	1
2	Getting Started	2
2.1	Achieving the Best Performance	2
3	Overview	3
3.1	Defining the 6810HDxI SDI/HD-SDI/3G Audio Embedder/De-embedder	3
4	Connecting the 6810HDxI	5
5	Operating the 6810HDxI	7
6	Technical Specifications	8

Figures

Figure 1: 6810HDxI SDI/HD-SDI/3G Audio Embedder/De-embedder	4
Figure 2: Connecting the 6810HDxI SDI/HD-SDI/3G Audio Embedder/De-embedder	6

1 Introduction

Welcome to Kramer Electronics! Since 1981, Kramer Electronics has been providing a world of unique, creative, and affordable solutions to the vast range of problems that confront the video, audio, presentation, and broadcasting professional on a daily basis. In recent years, we have redesigned and upgraded most of our line, making the best even better!

Our 1,000-plus different models now appear in 11 groups that are clearly defined by function: GROUP 1: Distribution Amplifiers; GROUP 2: Switchers and Matrix Switchers; GROUP 3: Control Systems; GROUP 4: Format/Standards Converters; GROUP 5: Range Extenders and Repeaters; GROUP 6: Specialty AV Products; GROUP 7: Scan Converters and Scalers; GROUP 8: Cables and Connectors; GROUP 9: Room Connectivity; GROUP 10: Accessories and Rack Adapters and GROUP 11: Sierra Products.

Congratulations on purchasing your Kramer **6810HDxI** *SDI/HD-SDI/3G Audio Embedder/De-embedder*, which is ideal for the following typical applications:

- Video broadcast studios for On-Air switching and signal routing
- Non-linear editing suites
- Video production studios, to connect various sources to acceptors

2 Getting Started

We recommend that you:

- Unpack the equipment carefully and save the original box and packaging materials for possible future shipment
- Review the contents of this user manual
Use Kramer high performance high resolution cables



Go to <http://www.kramerelectronics.com> to check for up-to-date user manuals, application programs, and to check if firmware upgrades are available (where appropriate).



Caution: No operator serviceable parts inside the unit

Warning: Use only the Kramer Electronics input power wall adapter that is provided with the unit

Warning: Disconnect the power and unplug the unit from the wall before installing

2.1 Achieving the Best Performance

To achieve the best performance:

- Use only good quality connection cables to avoid interference, deterioration in signal quality due to poor matching, and elevated noise levels (often associated with low quality cables)
- Avoid interference from neighboring electrical appliances that may adversely influence signal quality
- Position your Kramer **6810HDxI** away from moisture, excessive sunlight and dust

3 Overview

The Kramer **6810HDxI** *SDI/HD-SDI/3G Audio Embedder/De-embedder* is a broadcast quality audio embedder and de-embedder (it embeds and de-embeds simultaneously) for serial digital video.

The **6810HDxI** features:

- A maximum data rate of 3Gpbs
- 1 SDI video and 4 AES/3id inputs
- 1 SDI video and 4 AES/3id outputs
- 1 looping video input
- Group select buttons to choose the group to embed into or de-embed from each channel pair
- Kramer reKlocking™ & Equalization Technology that rebuilds the digital signal to travel longer distances
- Status indicators: audio group detect, embed/de-embed group select, and SD/HD lock
- 5V DC power

3.1 Defining the 6810HDxI SDI/HD-SDI/3G Audio Embedder/De-embedder

This section defines the **6810HDxI**.

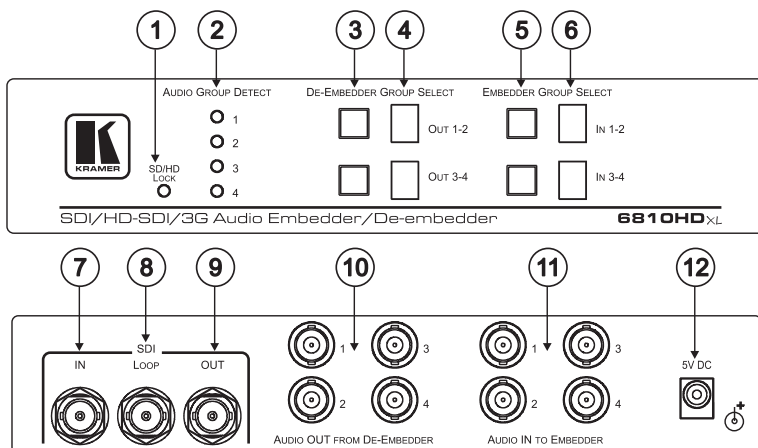


Figure 1: 6810HDxL SDI/HD-SDI/3G Audio Embedder/De-embedder

#	Feature		Function
1	SD/HD LOCK LED		Illuminates green when an SD signal is detected or blue when an HD signal is detected
2	AUDIO GROUP DETECT LEDs		Illuminates when an audio group (1 to 4) is detected on the SDI input stream
3	DE-EMBEDDER GROUP SELECT	Buttons	Press to select the audio group which is to be de-embedded into the given channels (OUT 1 and 2, OUT 3 and 4)
4		7-segment LED	Displays the number of the audio group which is de-embedded into the given channels (OUT 1 and 2, OUT 3 and 4)
5	EMBEDDER GROUP SELECT	Buttons	Press to select the audio group into which the given channels (IN 1 and 2, IN 3 and 4) will be embedded
6		7-segment LED	Displays the audio group into which the given channels (IN 1 and 2, IN 3 and 4) are embedded
7	SDI IN BNC Connector		Connects to the SDI source
8	SDI LOOP BNC Connector		Connects to the input loop acceptor
9	SDI OUT BNC Connector		Connects to the SDI acceptor
10	AUDIO OUT FROM DE-EMBEDDER BNC Connectors		Connects to the AES/3id audio acceptors (1 to 4)
11	AUDIO IN TO EMBEDDER BNC Connectors		Connects to the AES/3id audio sources (1 to 4)
12	5V DC		+5V DC connector for powering the unit

4 Connecting the 6810HDxI



Always switch off the power to each device before connecting it to your **6810HDxI**. After connecting your **6810HDxI**, connect its power and then switch on the power to each device.

To connect the **6810HDxI**, as illustrated in the example in [Figure 2](#), do the following:

1. Connect an SD/HD/3G HD-SDI source (such as, an HD/SD digital video player) to the SDI IN BNC connector.
2. Connect the SDI OUT BNC connector to an SDI and AES/id3 acceptor (such as, video broadcast equipment).
3. Connect an AES digital audio source (such as, DAT-Player 4) to the AUDIO IN TO EMBEDDER 4 BNC connector (for channel 4).
4. Connect the AUDIO OUT TO DE-EMBEDDER BNC connector (for channel 1) to an AES digital audio acceptor (such as, DAT-Recorder 1).
5. Connect the SDI LOOP BNC connector to an SDI acceptor (such as, an SDI display).
6. Connect the 5V DC power adapter to the power socket and connect the adapter to the mains electricity (not shown in [Figure 2](#)).

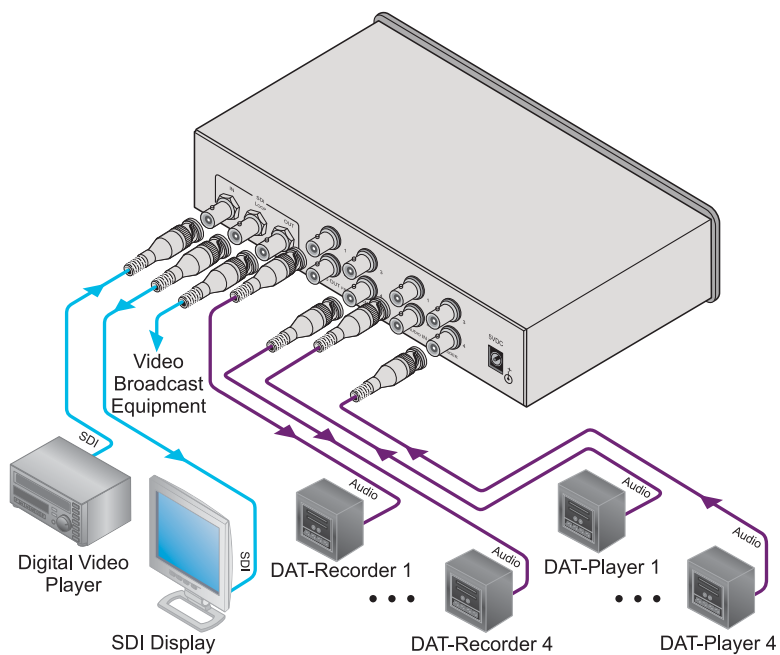


Figure 2: Connecting the 6810HDxI SDI/HD-SDI/3G Audio Embedder/De-embedder

5 Operating the 6810HDxI

To operate the **6810HDxI** as an embedder:

1. Connect the audio sources to the AUDIO IN TO EMBEDDER connectors.
2. Choose the target group by pressing the EMBEDDER GROUP SELECT button.

The display cycles through groups 1, 2, 3, 4, and –

The “–” indicates that no group is chosen and the given channels are not embedded.

If no audio is connected to the AES inputs, the display shows “–”.

3. The audio channels are embedded from the audio sources into the selected groups of the SDI data stream.

If audio was already embedded in the groups of the SDI stream, it is replaced by the audio embedded by the 6810HDxI.

To operate the **6810HDxI** as a de-embedder:

1. Connect the AUDIO OUT TO DE-EMBEDDER connectors to the audio acceptors.
2. Choose the source group by pressing the DE-EMBEDDER GROUP SELECT button.

The display cycles through groups 1, 2, 3, 4, and –.

The “–” indicates that no group is chosen and the given channels are muted.

You can scroll only the groups where audio is detected (as indicated by the Audio Group Detect LEDs)

3. The audio channels are de-embedded from the selected groups of the SDI data stream to the audio acceptors.

Note: You cannot de-embed the same group for two channels at the same time.

6 Technical Specifications

INPUTS:	1 x SD/HD/3G HD-SDI, 1 x SD/HD/3G HD-SDI loop, 4 x AES/id3 on BNC connectors
OUTPUTS:	1 x SD/HD/3G HD-SDI, 4 x AES/id3 on BNC connectors
SAMPLE RATE CONVERSION:	48kHz
OPERATING TEMPERATURE:	0° to +55°C (32° to 131°F)
STORAGE TEMPERATURE:	-45° to +72°C (-49° to 162°F)
HUMIDITY:	10% to 90%, RHL non-condensing
POWER SOURCE:	5V DC, 1.04A
DIMENSIONS	21.5cm x 16.3cm x 4.4cm (8.6" x 7" x 1.8") W, D, H
WEIGHT:	1.1kg (2.4lbs)
ACCESSORIES:	Power supply
OPTIONS:	RK-1 19" rack adapter
Specifications are subject to change without notice at http://www.kramerelectronics.com	

LIMITED WARRANTY

The warranty obligations of Kramer Electronics for this product are limited to the terms set forth below:

What is Covered

This limited warranty covers defects in materials and workmanship in this product.

What is Not Covered

This limited warranty does not cover any damage, deterioration or malfunction resulting from any alteration, modification, improper or unreasonable use or maintenance, misuse, abuse, accident, neglect, exposure to excess moisture, fire, improper packing and shipping (such claims must be presented to the carrier), lightning, power surges, or other acts of nature. This limited warranty does not cover any damage, deterioration or malfunction resulting from the installation or removal of this product from any installation, any unauthorized tampering with this product, any repairs attempted by anyone unauthorized by Kramer Electronics to make such repairs, or any other cause which does not relate directly to a defect in materials and/or workmanship of this product. This limited warranty does not cover cartons, equipment enclosures, cables or accessories used in conjunction with this product.

Without limiting any other exclusion herein, Kramer Electronics does not warrant that the product covered hereby, including, without limitation, the technology and/or integrated circuit(s) included in the product, will not become obsolete or that such items are or will remain compatible with any other product or technology with which the product may be used.

How Long Does this Coverage Last

Seven years as of this printing; please check our Web site for the most current and accurate warranty information.

Who is Covered

Only the original purchaser of this product is covered under this limited warranty. This limited warranty is not transferable to subsequent purchasers or owners of this product.

What Kramer Electronics will do

Kramer Electronics will, at its sole option, provide one of the following three remedies to whatever extent it shall deem necessary to satisfy a proper claim under this limited warranty:

1. Elect to repair or facilitate the repair of any defective parts within a reasonable period of time, free of any charge for the necessary parts and labor to complete the repair and restore this product to its proper operating condition. Kramer Electronics will also pay the shipping costs necessary to return this product once the repair is complete.
2. Replace this product with a direct replacement or with a similar product deemed by Kramer Electronics to perform substantially the same function as the original product.
3. Issue a refund of the original purchase price less depreciation to be determined based on the age of the product at the time remedy is sought under this limited warranty.

What Kramer Electronics will not do Under This Limited Warranty

If this product is returned to Kramer Electronics or the authorized dealer from which it was purchased or any other party authorized to repair Kramer Electronics products, this product must be insured during shipment, with the insurance and shipping charges prepaid by you. If this product is returned uninsured, you assume all risks of loss or damage during shipment. Kramer Electronics will not be responsible for any costs related to the removal or re-installation of this product from or into any installation. Kramer Electronics will not be responsible for any costs related to any setting up this product, any adjustment of user controls or any programming required for a specific installation of this product.

How to Obtain a Remedy under this Limited Warranty

To obtain a remedy under this limited warranty, you must contact either the authorized Kramer Electronics reseller from whom you purchased this product or the Kramer Electronics office nearest you. For a list of authorized Kramer Electronics resellers and/or Kramer Electronics authorized service providers, please visit our web site at www.kramerelectronics.com or contact the Kramer Electronics office nearest you.

In order to pursue any remedy under this limited warranty, you must possess an original, dated receipt as proof of purchase from an authorized Kramer Electronics reseller. If this product is returned under this limited warranty, a return authorization number, obtained from Kramer Electronics, will be required. You may also be directed to an authorized reseller or a person authorized by Kramer Electronics to repair the product.

If it is decided that this product should be returned directly to Kramer Electronics, this product should be properly packed, preferably in the original carton, for shipping. Cartons not bearing a return authorization number will be refused.

Limitation on Liability

THE MAXIMUM LIABILITY OF KRAMER ELECTRONICS UNDER THIS LIMITED WARRANTY SHALL NOT EXCEED THE ACTUAL PURCHASE PRICE PAID FOR THE PRODUCT. TO THE MAXIMUM EXTENT PERMITTED BY LAW, KRAMER ELECTRONICS IS NOT RESPONSIBLE FOR DIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF WARRANTY OR CONDITION, OR UNDER ANY OTHER LEGAL THEORY. Some countries, districts or states do not allow the exclusion or limitation of relief, special, incidental, consequential or indirect damages, or the limitation of liability to specified amounts, so the above limitations or exclusions may not apply to you.

Exclusive Remedy

TO THE MAXIMUM EXTENT PERMITTED BY LAW, THIS LIMITED WARRANTY AND THE REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, REMEDIES AND CONDITIONS, WHETHER ORAL OR WRITTEN, EXPRESS OR IMPLIED. TO THE MAXIMUM EXTENT PERMITTED BY LAW, KRAMER ELECTRONICS SPECIFICALLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IF KRAMER ELECTRONICS CANNOT LAWFULLY DISCLAIM OR EXCLUDE IMPLIED WARRANTIES UNDER APPLICABLE LAW, THEN ALL IMPLIED WARRANTIES COVERING THIS PRODUCT, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, SHALL APPLY TO THIS PRODUCT AS PROVIDED UNDER APPLICABLE LAW.

IF ANY PRODUCT TO WHICH THIS LIMITED WARRANTY APPLIES IS A "CONSUMER PRODUCT" UNDER THE MAGNUSON-MOSS WARRANTY ACT (15 U.S.C.A. §2301, ET SEQ.) OR OTHER APPLICABLE LAW, THE FOREGOING DISCLAIMER OF IMPLIED WARRANTIES SHALL NOT APPLY TO YOU, AND ALL IMPLIED WARRANTIES ON THIS PRODUCT, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR THE PARTICULAR PURPOSE, SHALL APPLY AS PROVIDED UNDER APPLICABLE LAW.

Other Conditions

This limited warranty gives you specific legal rights, and you may have other rights which vary from country to country or state to state.

This limited warranty is void if (i) the label bearing the serial number of this product has been removed or defaced, (ii) the product is not distributed by Kramer Electronics or (iii) this product is not purchased from an authorized Kramer Electronics reseller. If you are unsure whether a reseller is an authorized Kramer Electronics reseller, please visit our Web site at www.kramerelectronics.com or contact a Kramer Electronics office from the list at the end of this document.

Your rights under this limited warranty are not diminished if you do not complete and return the product registration form or complete and submit the online product registration form. Kramer Electronics thanks you for purchasing a Kramer Electronics product. We hope it will give you years of satisfaction.



For the latest information on our products and a list of Kramer distributors, visit our Web site where updates to this user manual may be found.

We welcome your questions, comments, and feedback.

Web site: www.kramerelectronics.com

E-mail: info@kramere1.com



SAFETY WARNING

Disconnect the unit from the power supply before opening and servicing